

New

CW664


CW600, economical cylinder bed interlock stitch machine

We are introducing to you this new economical interlock cylinder bed machine. The CW600 is a **C**ompetitive **W**-series model, with respect to price and technology. The CW664-series is very similar to the W664-series, as most of the parts are common.

All other features are common to W664-series. The specification code is also familiar from W664-series, as it is the same.




CW664-01CBx356

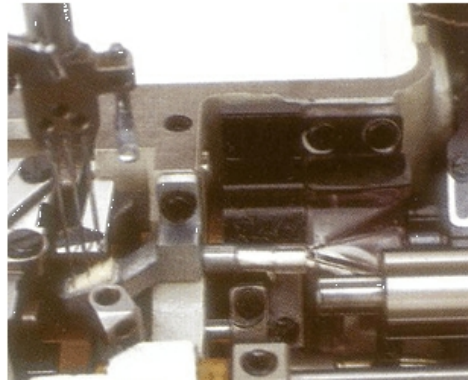

showing the lower HR-device used for cooling and lubricating the point of the needle



showing the upper HR-device for lubricating the needle threads (used optional)

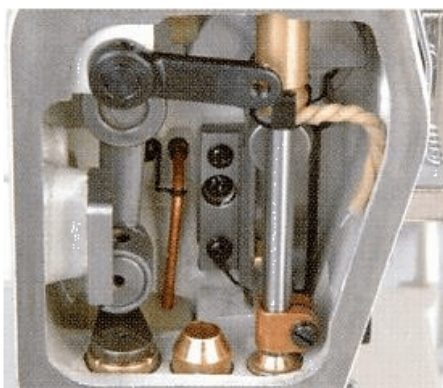


Needle bar drive with lubrication by oil wick and vacuum suction




left and right picture: traditional thread take-up with finger deflector



and the traditional hand wheel with scale for stitch length adjustment

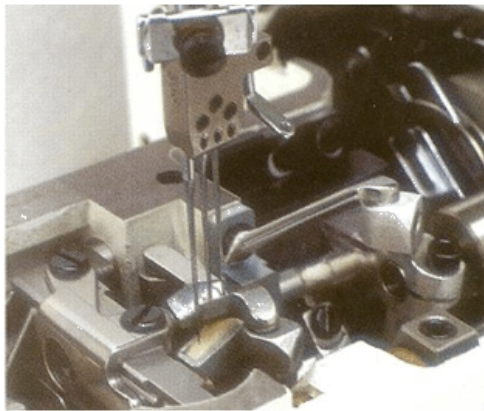

Retractable needle guards to prevent skipped stitches

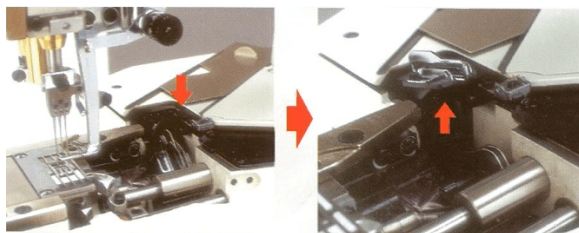

Spring-out looper thread take-up for easy threading


❖ Features and advantages

- ✓ Oil circulation by oil pump and oil filter
- ✓ Forcibly drained oil at the needle bar
- ✓ Differential feed adjustment from the outside, lever type
- ✓ Stitch length adjustment by screw and scale (lever type allows condensed stitches in conjunction with MS-100)
- ✓ Equipped with HR-device, to allow high speed with vulnerable fabric and/or thread.
- ✓ Traditional needle thread take-up with safety protection
- ✓ Metal hand wheel is standard
- ✓ Swing-in and -out looper thread take-up for easier threading
- ✓ Gauge parts are same as W664
- ✓ and many more of the well known features

Please, see available subclasses and subclass specifications on appended page.

Pegasus Europa

CW664 – Specifications

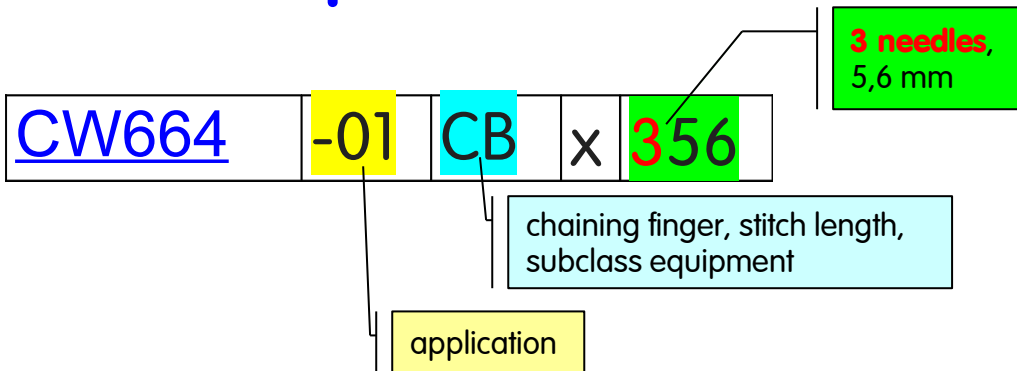

model	application	needles	needle distance (mm)					Thre ads	Stitch-length (mm)	Differential ratio	Presser foot lift (mm)	speed r.p.m
			3.2	4.0	4.8	5.6	6.4					
CW664-01CB	plain seaming versatile	2	o	©	o	o	o	4	4.5	0.6-1.3	5.8	6.000
		3	-	-	-	©	o	5			5.1	
CW664-02GB	binding	2	o	o	o	o	o	4	4.5	0.6-1.3	5.8	6.000
		3	-	-	-	©	o	5			5.1	
CW664-03FB	covering	2	o	o	o	o	o	4	4.5	0.6-1.3	5.8	6.000
		3	-	-	-	©	o	5			5.1	
CW664-03GB	covering	2	-	o	o	o	o	4	4.5	0.6-1.3	5.8	6.000
		3	-	-	-	©	-	5			5.1	
CW664-08AC	hemming	2	-	o	o	-	-	4	4.5	0.6-1.3	5.8	6.000
		3	-	-	-	©	o	5			5.1	
CW664-08BB	hemming	2	-	o	o	-	-	4	4.5	0.6-1.3	5.8	6.000
		3	-	-	-	©	o	5			5.1	
CW664-33AC	attaching elastic	3	-	-	-	©	-	5	4.5	0.6-1.3	5.1	5.500
CW664-35BC	hemming	3	-	-	-	©	-	5	4.5	0.6-1.3	5.1	5.500

Please note:

© = standard

o = available

- = not assigned

Pegasus Europa