



NEW

Minimal Lubrication



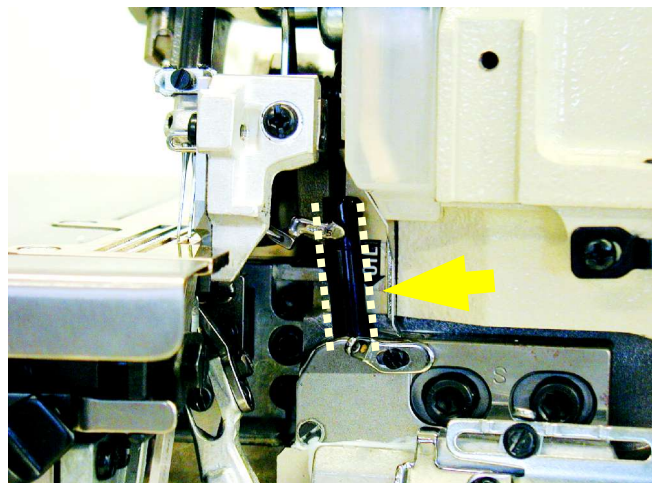

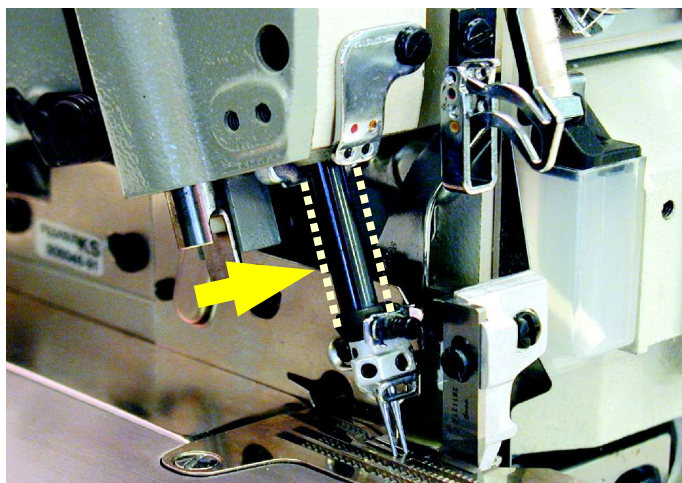





EX5214-M3/333-2x4/KS372\Y1630

Minimal Lubrication, 2 – needle overlock machine for plain seaming
KS 372: vertical type thread chain cutter

◆ Features and advantages

- ✓ To prevent oils stains on fabric due to oil splashing from the needle bar and/or the upper looper.
- ✓ A conventional sewing speed of max. 8.500 rpm is achieved with minimal lubrication system.
- ✓ Thanks to the special coating, the needle bar and the upper looper bar are very durable.
- ✓ It contributes to the oil spot prevention while keeping productivity.
- ✓ The other specifications and the features on this machine are the same as on the conventional EX-series.

Subclass Specifications

		 (mm)	 (mm)	 (mm)		 (mm)	 (rpm)
2	3	2	4	3.8	0.7-2	5	7,500

PEGASUS EUROPA GMBH

Brüsseler Str. 5, D-67657 Kaiserslautern

Phone: +49-631-30328500 Fax.: +49-631-30328500 www.pegasus-europa.de

© Pegasus Sewing Machine Mfg. Co., Ltd
Catalogue no. 102800 printed Nov. 2004