




New subclass for butt seaming operations, M752-90


We are introducing the new subclass of M752 for butt seaming of fabric rolls in dyeing and finishing operations.



This new developed subclass is especially made for the application of butt seaming and offers a wide seam of 6 mm, which has opened a seam width of 12 mm.

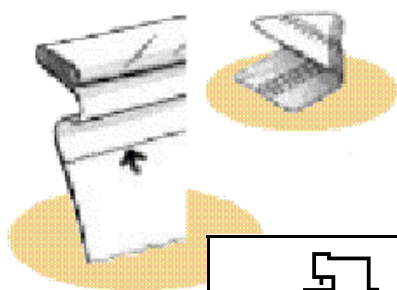

This way a big portion of fabric is included in the seam, avoiding breakage or fraying during the dyeing and finishing process, where a big strain is put on the seam, especially during the finishing process.

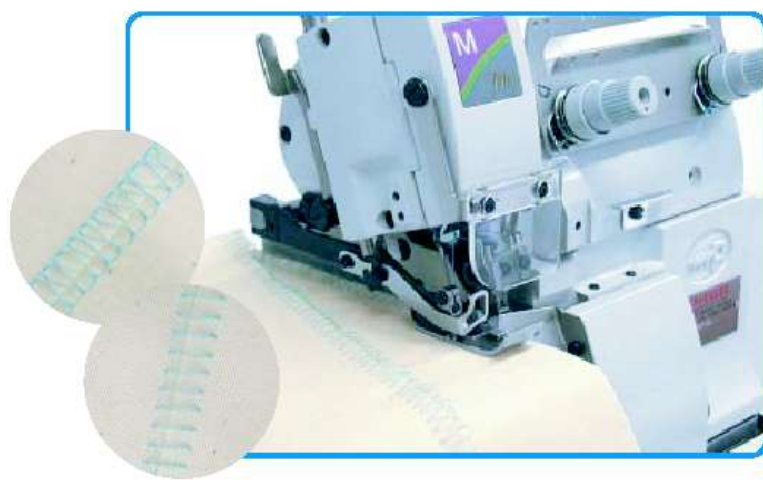

Main features:

- 1-needle, 2-thread overlock for butt seaming
- overlock width 6 mm, opened is 12 mm
- equipped with wide knife
- max. stitch length is 6 mm
- oil lubrication by oil pump
- max. speed is 5000 rpm.
- needle system DCx27, size 14
- max. looper thread size 80
- without HR - device

Subclass Specifications

M752-90-6	1	2	6	0,4-6,2	1:1,2	5,5	5000

In comparison to DCM-204 the machine achieves a 25 % higher speed of up to 5000 rpm and is much stronger built.....

... all at reasonable price!